

ESPECIFICACIONES TÉCNICAS:

Construcción

Tuerca de sombrerete	poliamida PA6 V-2
Junta anular	policloropropeno-caucho nitrílico CR/NBR
Tubuladura intermedia	poliamida PA6 V-2
Rosca de conexión	Pg, según DIN 40430

Propiedades

- Descarga de tracción integrada
- Amplio rango de sellado y sujeción
- Fácil de montar
- Resistencia a los rayos UV y a la intemperie según UL 514B

Rango de temperatura -20 °C/+100 °C (dinámico)
-40 °C (estático, breve)

Grado de protección IP68-5 bar

Norma de ensayo UL 514B

Documento UL/CSA E140310

Nota Consulte los datos de los resultados de la prueba en el catálogo principal o en www.jacob-gmbh.de

TECHNICAL DATA:

Configuration

Dome nut	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Polyamide PA6 V-2
Connecting thread	Pg, as per DIN 40430

Properties

- integrated anchorage
- wide sealing and clamping range
- easy-to-install
- UV- and weather resistance according UL 514B


Temperature range -20 °C / +100 °C (dynamic)
-40 °C (static, short term)

Protection grade IP68 - 5 bar

Test standard UL 514B

UL / CSA-File E140310

Comment for details about test results - order main catalog or check at www.jacob-gmbh.de/en

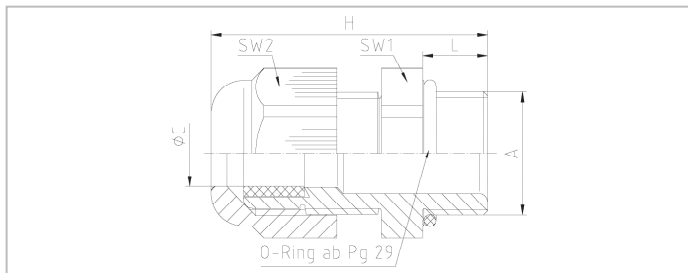

Características

Characteristics

Rosca de conexión, largo estándar

Connecting thread standard length

A	øC mm	L mm	SW1 mm	SW2 mm	H mm	📦	Color		
							RAL 7001 gris plata silver grey	RAL 7035 gris luminoso light grey	RAL 9005 negro intenso jet black
							N.º artículo/Part No.	N.º artículo/Part No.	N.º artículo/Part No.
Pg 7	3-6,5	8	15	15	30,5	100	50.007 PA	50.007 PA7035	50.007 PA/SW
Pg 9	4-8	8	19	19	34	100	50.009 PA	50.009 PA7035	50.009 PA/SW
Pg 11	5-10	8	22	22	37	100	50.011 PA	50.011 PA7035	50.011 PA/SW
Pg 13,5	6-12	9	24	24	39	100	50.013 PA	50.013 PA7035	50.013 PA/SW
Pg 16	10-14	10	27	27	42,5	50	50.016 PA	50.016 PA7035	50.016 PA/SW
Pg 21	13-18	11	33	33	47,5	50	50.021 PA	50.021 PA7035	50.021 PA/SW
Pg 29	18-25	11	42	42	53	25	50.029 PA	50.029 PA7035	50.029 PA/SW
Pg 36	22-32	13	53	53	61	10	50.036 PA	50.036 PA7035	50.036 PA/SW
Pg 42	30-38	13	60	60	65	5	50.042 PA	50.042 PA7035	50.042 PA/SW
Pg 48	34-44	14	65	65	67	5	50.048 PA	50.048 PA7035	50.048 PA/SW

Rosca de conexión larga

Connecting thread long

A	øC mm	L mm	SW1 mm	SW2 mm	H mm	📦	Color		
							RAL 7001 gris plata silver grey	RAL 7035 gris luminoso light grey	RAL 9005 negro intenso jet black
							N.º artículo/Part No.	N.º artículo/Part No.	N.º artículo/Part No.
Pg 7	3-6,5	15	15	15	37,5	100	50.007 PA15	50007/7035/15	50.007 PASW15
Pg 9	4-8	15	19	19	41	100	50.009 PA15	50009/7035/15	50.009 PASW15
Pg 11	5-10	15	22	22	44	100	50.011 PA15	50011/7035/15	50.011 PASW15
Pg 13,5	6-12	15	24	24	45	100	50.013 PA15	50013/7035/15	50.013 PASW15
Pg 16	10-14	15	27	27	47,5	50	50.016 PA15	50016/7035/15	50.016 PASW15
Pg 21	13-18	15	33	33	51,5	50	50.021 PA15	50021/7035/15	50.021 PASW15
Pg 29	18-25	15	42	42	57	25	50.029 PA15	50029/7035/15	50.029 PASW15
Pg 36	22-32	18	53	53	66	10	50.036 PA18	50036/7035/18	50.036 PASW18